


TOULOUSE – HEAVY COMMERCIAL USE SOLUTION DYED CARPET TILE

Construction		Tufted 1/10" loop pile
Pile Composition		100% solution dyed nylon
Tuft Density		171,260/m ²
Pile Weight	ISO 8543	500 gr/m ²
Pile Height	ISO 1766	3.5 mm
Tile Backing		Bitumen with fibreglass scrim
Total Thickness	ISO 1765	6.0 mm
Total Weight	ISO 8543	4300 gr/m ²
Tile Size		500mm × 500mm (20 tiles/box = 5m ²)
Use Classification	Method EN 1307	Class 33 Heavy Contract
Castor Chair Test	EN 985	A – suitable for continuous use
Dimensional Stability	DIN 54318	Pass
Sound Absorption	ISO 140-8	21dB
Static Loading		Anti-static
Reaction To Fire	BS EN 13501-1	Cfl-s1
Hot Metal Nut Test	BS 4790	Low radius of char
Colour Fastness to Light	BS EN ISO 105	6
Colour Fastness to Water	BS EN ISO 105	5
Colour Fastness to Wet Rubbing	BS EN ISO 105	4-5
Wear Warranty		10 Year Heavy Contract

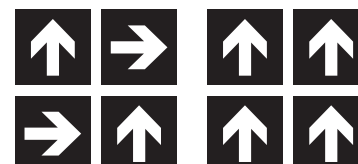

Recommended Maintenance	The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions. These carpet tiles must be sold and installed in accordance with BS 5325.
Laying Instructions	These tiles require no underlay and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on wood, vinyl or in open areas larger than 30m ² , it is advisable to use a suitable tackifier. Directional arrows are printed on the back of each tile.
Please Note	Dye lot colours may vary from batch to batch, it is therefore advisable that when ordering a large continuous area, tiles of the same batch number be specified at the time of ordering. All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance. All warranties and subject to Terms and Conditions.

For a brochure, photos and more information, please visit toulousecarpettiles.co.uk